


Linux 主机如何自行切换为 PHP5.3.15

1、首先打开 CPANLE 控制面板找到“文件管理器”



2、单击主页位置

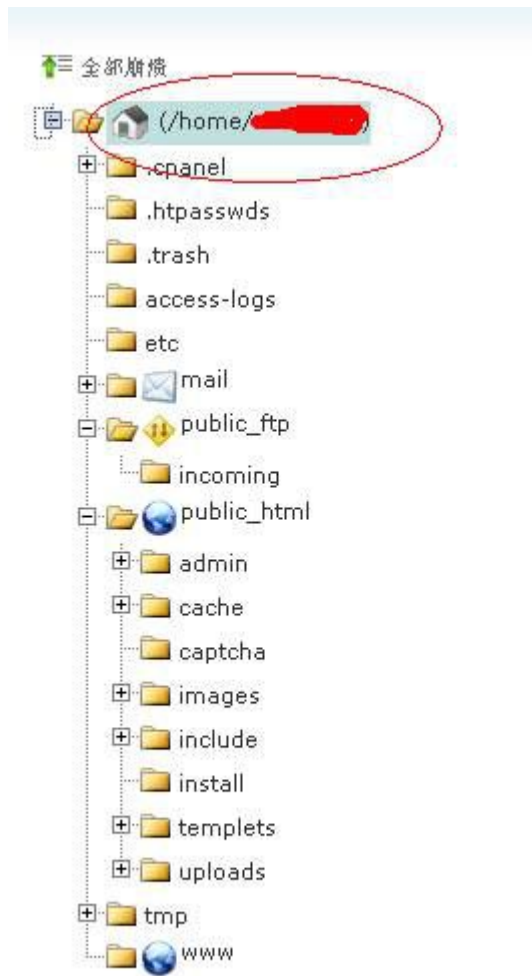


3、然后新建文件





4、注意此文件名为 usealtphp,内容为空即可

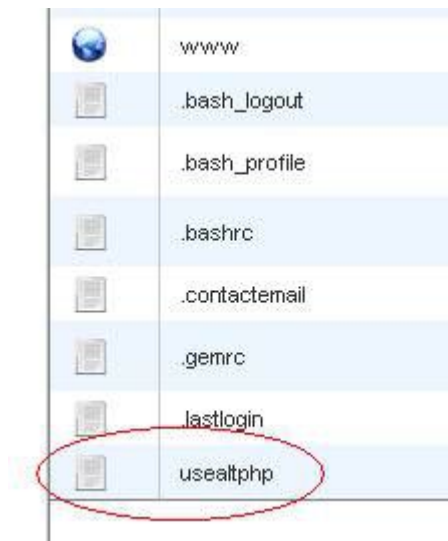

5、然后上传个 php 探针

PHP Version 5.3.15

System	Linux cp-dd-us-1.webhostbox.net 2.6.18-308.4.1.el5 #1 SMP Tue / 2012 x86_64
Build Date	Aug 21 2012 11:28:05
Configure Command	'./configure' '--enable-bcmath' '--enable-calendar' '--enable-exif' '--e --enable-gd-native-ttf' '--enable-libxml' '--enable-magic-quotes' '--e --enable-pdo=shared' '--enable-soap' '--enable-sockets' '--enable- --prefix=/usr/local/altphp' '--with-bz2' '--with-curl=/opt/curlssl/' '--with --with-gd' '--with-gettext' '--with-imap=/opt/php_with_imap_client/' ' --with-jpeg-dir=/usr' '--with-kerberos' '--with-libdir=lib64' '--with-libe libxml-dir=/opt/xml2' '--with-libxml-dir=/opt/xml2/' '--with-mcrypt=/op mysql=/usr' '--with-mysql-sock=/var/lib/mysql/mysql.sock' '--with-m /bin/mysql_config' '--with-openssl=/usr' '--with-openssl-dir=/usr' '-- --with-pdo-mysql=shared' '--with-pdo-sqlite=shared' '--with-pic' '--v sqlite=shared' '--with-xmlrpc' '--with-xpm-dir=/usr' '--with-xsl=/opt/xs zlib-dir=/usr'

说明该 linux 主机已经切换为 5.3.15 的版本

若要再切换为 5.2.17 则只要把 usealtphp 删除即可